


LOWER MERION STANDARDS FOR TEMPORARY AND FINAL ROAD RESTORATIONS

TEMPORARY RESTORATION


ROAD SURFACE

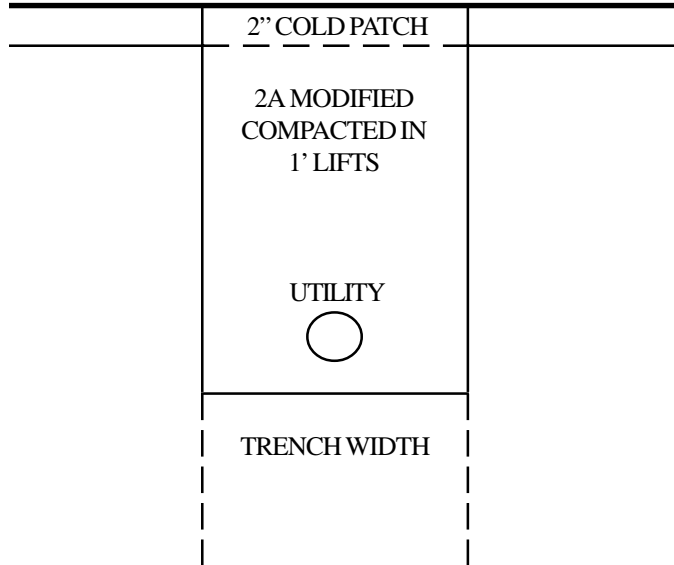

This item shall include the backfilling of **all** excavations with 2A modified compacted in 1' lifts, to within 2" of road surface. The final 2" will be filled in with 2" of cold patch compacted with a vibratory plate tamper.

FINAL RESTORATION

ROAD SURFACE

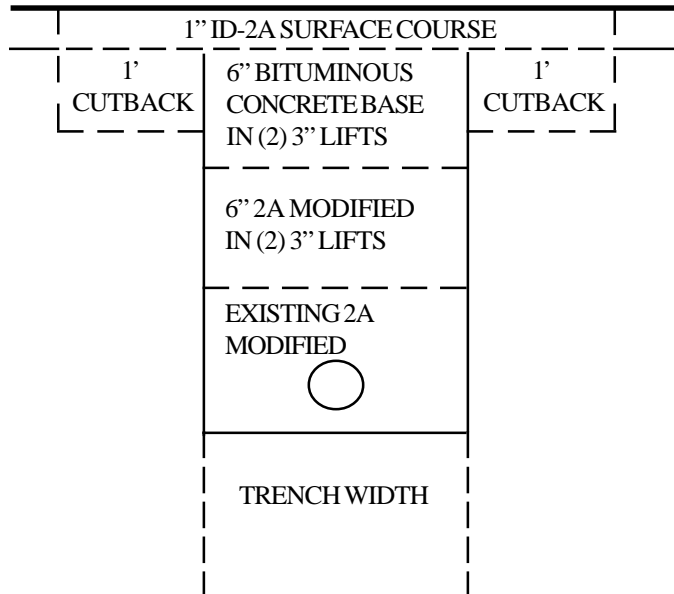

This item shall include the excavation of temporary paving to a depth of thirteen inches, compaction of sub-grade, installation and compaction of 6" of modified sub-base in two 3 inch layers, installation of 6" bituminous concrete base course compacted in two 3 inch layers and 1" of ID-2A surface course. It will be necessary, prior to the placing of the ID-2A surface course to cutback at least one foot beyond the edge of the trench to effectuate proper restoration and seal the edge of the cut with AC-20 bituminous sealer. All materials used in this restoration must meet the specifications of PennDOT Form 408.

NOT TO SCALE